



O-Ring USA Standard Sizes

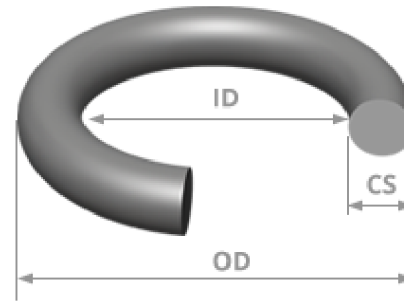


Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
001	0.029	0.040	0.109	0.74	1.02	2.78
002	0.042	0.050	0.142	1.07	1.27	3.61
003	0.056	0.060	0.176	1.42	1.52	4.46
004	0.070	0.070	0.210	1.78	1.78	5.34
005	0.101	0.070	0.241	2.57	1.78	6.13
006	0.114	0.070	0.254	2.90	1.78	6.46
007	0.145	0.070	0.285	3.68	1.78	7.24
008	0.176	0.070	0.316	4.47	1.78	8.03
009	0.208	0.070	0.348	5.28	1.78	8.84
010	0.239	0.070	0.379	6.07	1.78	9.63
011	0.301	0.070	0.441	7.65	1.78	11.21
012	0.364	0.070	0.504	9.25	1.78	12.81
013	0.426	0.070	0.566	10.82	1.78	14.38
014	0.489	0.070	0.629	12.42	1.78	15.98
015	0.551	0.070	0.691	14.00	1.78	17.56
016	0.614	0.070	0.754	15.60	1.78	19.16
017	0.676	0.070	0.816	17.17	1.78	20.73
018	0.739	0.070	0.879	18.77	1.78	22.33
019	0.801	0.070	0.941	20.35	1.78	23.91
020	0.864	0.070	1.004	21.95	1.78	25.51
021	0.926	0.070	1.066	23.52	1.78	27.08
022	0.989	0.070	1.129	25.12	1.78	28.68
023	1.051	0.070	1.191	26.70	1.78	30.26
024	1.114	0.070	1.254	28.30	1.78	31.86
025	1.176	0.070	1.316	29.87	1.78	33.43

O-Ring USA Standard Sizes

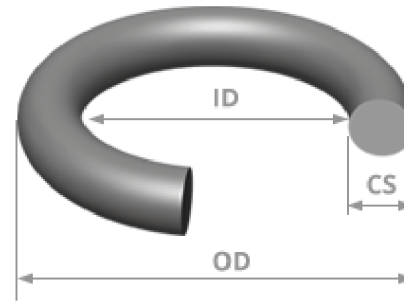


Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
026	1.239	0.070	1.379	31.47	1.78	35.03
027	1.301	0.070	1.441	33.05	1.78	36.61
028	1.364	0.070	1.504	34.65	1.78	38.21
029	1.489	0.070	1.629	37.82	1.78	41.38
030	1.614	0.070	1.754	41.00	1.78	44.56
031	1.739	0.070	1.879	44.17	1.78	47.73
032	1.864	0.070	2.004	47.35	1.78	50.91
033	1.989	0.070	2.129	50.52	1.78	54.08
034	2.114	0.070	2.254	53.70	1.78	57.26
035	2.239	0.070	2.379	56.87	1.78	60.43
036	2.364	0.070	2.504	60.05	1.78	63.61
037	2.489	0.070	2.629	63.22	1.78	66.78
038	2.614	0.070	2.754	66.40	1.78	69.96
039	2.739	0.070	2.879	69.57	1.78	73.13
040	2.864	0.070	3.004	72.75	1.78	76.31
041	2.989	0.070	3.129	75.92	1.78	79.48
042	3.239	0.070	3.379	82.27	1.78	85.83
043	3.489	0.070	3.629	88.62	1.78	92.18
044	3.739	0.070	3.879	94.97	1.78	98.53
045	3.989	0.070	4.129	101.32	1.78	104.88
046	4.239	0.070	4.379	107.67	1.78	111.23
047	4.489	0.070	4.629	114.02	1.78	117.58
048	4.739	0.070	4.879	120.37	1.78	123.93
049	4.989	0.070	5.129	126.72	1.78	130.28
050	5.239	0.070	5.379	133.07	1.78	136.63

O-Ring USA Standard Sizes

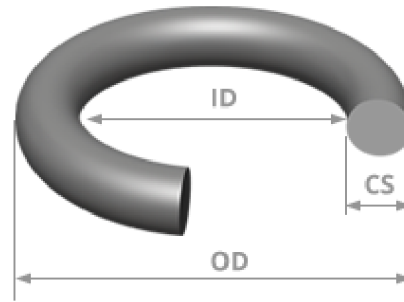


Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
102	0.049	0.103	0.255	1.24	2.62	6.48
103	0.081	0.103	0.287	2.06	2.62	7.30
104	0.112	0.103	0.318	2.84	2.62	8.08
105	0.143	0.103	0.349	3.63	2.62	8.87
106	0.174	0.103	0.380	4.42	2.62	9.66
107	0.206	0.103	0.412	5.23	2.62	10.47
108	0.237	0.103	0.443	6.02	2.62	11.26
109	0.299	0.103	0.505	7.59	2.62	12.83
110	0.362	0.103	0.568	9.19	2.62	14.43
111	0.424	0.103	0.630	10.77	2.62	16.01
112	0.487	0.103	0.693	12.37	2.62	17.61
113	0.549	0.103	0.755	13.94	2.62	19.18
114	0.612	0.103	0.818	15.54	2.62	20.78
115	0.674	0.103	0.880	17.12	2.62	22.36
116	0.737	0.103	0.943	18.72	2.62	23.96
117	0.799	0.103	1.005	20.30	2.62	25.54
118	0.862	0.103	1.068	21.89	2.62	27.13
119	0.924	0.103	1.130	23.47	2.62	28.71
120	0.987	0.103	1.193	25.07	2.62	30.31
121	1.049	0.103	1.255	26.64	2.62	31.88
122	1.112	0.103	1.318	28.24	2.62	33.48
123	1.174	0.103	1.380	29.82	2.62	35.06
124	1.237	0.103	1.443	31.42	2.62	36.66
125	1.299	0.103	1.505	32.99	2.62	38.23
126	1.362	0.103	1.568	34.59	2.62	39.83

O-Ring USA Standard Sizes

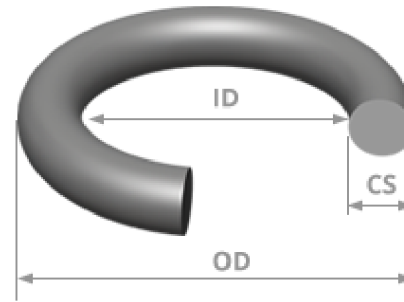


Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
127	1.424	0.103	1.630	36.17	2.62	41.41
128	1.487	0.103	1.693	37.77	2.62	43.01
129	1.549	0.103	1.755	39.34	2.62	44.58
130	1.612	0.103	1.818	40.94	2.62	46.18
131	1.674	0.103	1.880	42.52	2.62	47.76
132	1.737	0.103	1.943	44.12	2.62	49.36
133	1.799	0.103	2.005	45.69	2.62	50.93
134	1.862	0.103	2.068	47.30	2.62	52.54
135	1.925	0.103	2.131	48.90	2.62	54.14
136	1.987	0.103	2.193	50.47	2.62	55.71
137	2.050	0.103	2.256	52.07	2.62	57.31
138	2.112	0.103	2.318	53.64	2.62	58.88
139	2.175	0.103	2.381	55.25	2.62	60.49
140	2.237	0.103	2.443	56.82	2.62	62.06
141	2.300	0.103	2.506	58.42	2.62	63.66
142	2.362	0.103	2.568	59.99	2.62	65.23
143	2.425	0.103	2.631	61.60	2.62	66.84
144	2.487	0.103	2.693	63.17	2.62	68.41
145	2.550	0.103	2.756	64.77	2.62	70.01
146	2.612	0.103	2.818	66.34	2.62	71.58
147	2.675	0.103	2.881	67.95	2.62	73.19
148	2.737	0.103	2.943	69.52	2.62	74.76
149	2.800	0.103	3.006	71.12	2.62	76.36
150	2.862	0.103	3.068	72.69	2.62	77.93
151	2.987	0.103	3.193	75.87	2.62	81.11

O-Ring USA Standard Sizes

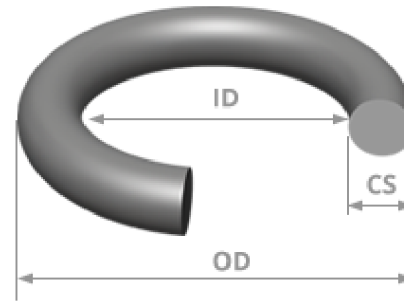


Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
152	3.237	0.103	3.443	82.22	2.62	87.46
153	3.487	0.103	3.693	88.57	2.62	93.81
154	3.737	0.103	3.943	94.92	2.62	100.16
155	3.987	0.103	4.193	101.27	2.62	106.51
156	4.237	0.103	4.443	107.62	2.62	112.86
157	4.487	0.103	4.693	113.97	2.62	119.21
158	4.737	0.103	4.943	120.32	2.62	125.56
159	4.987	0.103	5.193	126.67	2.62	131.91
160	5.237	0.103	5.443	133.02	2.62	138.26
161	5.487	0.103	5.693	139.37	2.62	144.61
162	5.737	0.103	5.943	145.72	2.62	150.96
163	5.987	0.103	6.193	152.07	2.62	157.31
164	6.237	0.103	6.443	158.42	2.62	163.66
165	6.487	0.103	6.693	164.77	2.62	170.01
166	6.737	0.103	6.943	171.12	2.62	176.36
167	6.987	0.103	7.193	177.47	2.62	182.71
168	7.237	0.103	7.443	183.82	2.62	189.06
169	7.487	0.103	7.693	190.17	2.62	195.41
170	7.737	0.103	7.943	196.52	2.62	201.76
171	7.987	0.103	8.193	202.87	2.62	208.11
172	8.237	0.103	8.443	209.22	2.62	214.46
173	8.487	0.103	8.693	215.57	2.62	220.81
174	8.737	0.103	8.943	221.92	2.62	227.16
175	8.987	0.103	9.193	228.27	2.62	233.51
176	9.237	0.103	9.443	234.62	2.62	239.86

O-Ring USA Standard Sizes

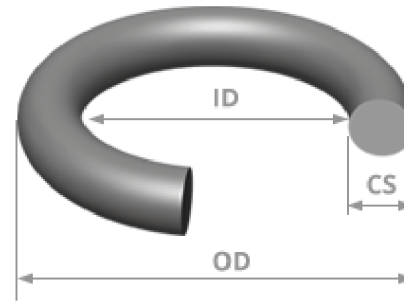


Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
177	9.487	0.103	9.693	240.97	2.62	246.21
178	9.737	0.103	9.943	247.32	2.62	252.56
201	0.171	0.139	0.449	4.34	3.53	11.40
202	0.234	0.139	0.512	5.94	3.53	13.00
203	0.296	0.139	0.574	7.52	3.53	14.58
204	0.359	0.139	0.637	9.12	3.53	16.18
205	0.421	0.139	0.699	10.69	3.53	17.75
206	0.484	0.139	0.762	12.29	3.53	19.35
207	0.546	0.139	0.824	13.87	3.53	20.93
208	0.609	0.139	0.887	15.47	3.53	22.53
209	0.671	0.139	0.949	17.04	3.53	24.10
210	0.734	0.139	1.012	18.64	3.53	25.70
211	0.796	0.139	1.074	20.22	3.53	27.28
212	0.859	0.139	1.137	21.82	3.53	28.88
213	0.921	0.139	1.199	23.39	3.53	30.45
214	0.984	0.139	1.262	25.00	3.53	32.06
215	1.046	0.139	1.324	26.57	3.53	33.63
216	1.109	0.139	1.387	28.17	3.53	35.23
217	1.171	0.139	1.449	29.74	3.53	36.80
218	1.234	0.139	1.512	31.34	3.53	38.40
219	1.296	0.139	1.574	32.92	3.53	39.98
220	1.359	0.139	1.637	34.52	3.53	41.58
221	1.421	0.139	1.699	36.09	3.53	43.15
222	1.484	0.139	1.762	37.69	3.53	44.75
223	1.609	0.139	1.887	40.87	3.53	47.93

O-Ring USA Standard Sizes

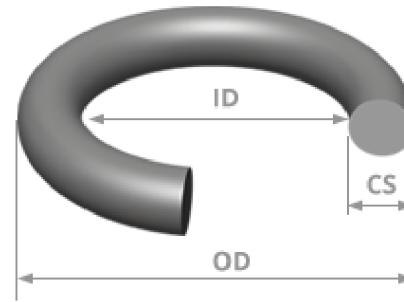


Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
224	1.734	0.139	2.012	44.04	3.53	51.10
225	1.859	0.139	2.137	47.22	3.53	54.28
226	1.984	0.139	2.262	50.39	3.53	57.45
227	2.109	0.139	2.387	53.57	3.53	60.63
228	2.234	0.139	2.512	56.74	3.53	63.80
229	2.359	0.139	2.637	59.92	3.53	66.98
230	2.484	0.139	2.762	63.09	3.53	70.15
231	2.609	0.139	2.887	66.27	3.53	73.33
232	2.734	0.139	3.012	69.44	3.53	76.50
233	2.859	0.139	3.137	72.62	3.53	79.68
234	2.984	0.139	3.262	75.79	3.53	82.85
235	3.109	0.139	3.387	78.97	3.53	86.03
236	3.234	0.139	3.512	82.14	3.53	89.20
237	3.359	0.139	3.637	85.32	3.53	92.38
238	3.484	0.139	3.762	88.49	3.53	95.55
239	3.609	0.139	3.887	91.67	3.53	98.73
240	3.734	0.139	4.012	94.84	3.53	101.90
241	3.859	0.139	4.137	98.02	3.53	105.08
242	3.984	0.139	4.262	101.19	3.53	108.25
243	4.109	0.139	4.387	104.37	3.53	111.43
244	4.234	0.139	4.512	107.54	3.53	114.60
245	4.359	0.139	4.637	110.72	3.53	117.78
246	4.484	0.139	4.762	113.89	3.53	120.95
247	4.609	0.139	4.887	117.07	3.53	124.13
248	4.734	0.139	5.012	120.24	3.53	127.30

O-Ring USA Standard Sizes

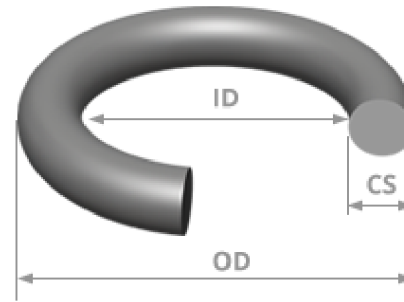


Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
249	4.859	0.139	5.137	123.42	3.53	130.48
250	4.984	0.139	5.262	126.59	3.53	133.65
251	5.109	0.139	5.387	129.77	3.53	136.83
252	5.234	0.139	5.512	132.94	3.53	140.00
253	5.359	0.139	5.637	136.12	3.53	143.18
254	5.484	0.139	5.762	139.29	3.53	146.35
255	5.609	0.139	5.887	142.47	3.53	149.53
256	5.734	0.139	6.012	145.65	3.53	152.71
257	5.859	0.139	6.137	148.82	3.53	155.88
258	5.984	0.139	6.262	151.99	3.53	159.05
259	6.234	0.139	6.512	158.34	3.53	165.40
260	6.484	0.139	6.762	164.69	3.53	171.75
261	6.734	0.139	7.012	171.04	3.53	178.10
262	6.984	0.139	7.262	177.39	3.53	184.45
263	7.234	0.139	7.512	183.74	3.53	190.80
264	7.484	0.139	7.762	190.09	3.53	197.15
265	7.734	0.139	8.012	196.44	3.53	203.50
266	7.984	0.139	8.262	202.79	3.53	209.85
267	8.234	0.139	8.512	209.14	3.53	216.20
268	8.484	0.139	8.762	215.49	3.53	222.55
269	8.734	0.139	9.012	221.84	3.53	228.90
270	8.984	0.139	9.262	228.19	3.53	235.25
271	9.234	0.139	9.512	234.54	3.53	241.60
272	9.484	0.139	9.762	240.89	3.53	247.95
273	9.734	0.139	10.012	247.24	3.53	254.30

O-Ring USA Standard Sizes

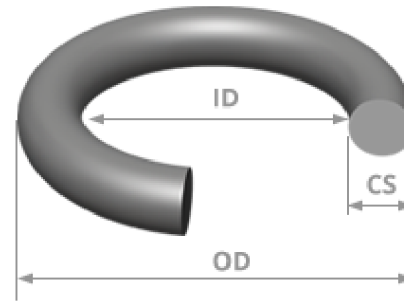


Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
274	9.984	0.139	10.262	253.59	3.53	260.65
275	10.484	0.139	10.762	266.29	3.53	273.35
276	10.984	0.139	11.262	278.99	3.53	286.05
277	11.484	0.139	11.762	291.69	3.53	298.75
278	11.984	0.139	12.262	304.39	3.53	311.45
279	12.984	0.139	13.262	329.79	3.53	336.85
280	13.984	0.139	14.262	355.19	3.53	362.25
281	14.984	0.139	15.262	380.59	3.53	387.65
282	15.955	0.139	16.233	405.26	3.53	412.32
283	16.955	0.139	17.233	430.66	3.53	437.72
284	17.955	0.139	18.233	456.06	3.53	463.12
309	0.412	0.210	0.832	10.46	5.33	21.12
310	0.475	0.210	0.895	12.07	5.33	22.73
311	0.537	0.210	0.957	13.64	5.33	24.30
312	0.600	0.210	1.020	15.24	5.33	25.90
313	0.662	0.210	1.082	16.81	5.33	27.47
314	0.725	0.210	1.145	18.42	5.33	29.08
315	0.787	0.210	1.207	19.99	5.33	30.65
316	0.850	0.210	1.270	21.59	5.33	32.25
317	0.912	0.210	1.332	23.16	5.33	33.82
318	0.975	0.210	1.395	24.77	5.33	35.43
319	1.037	0.210	1.457	26.34	5.33	37.00
320	1.100	0.210	1.520	27.94	5.33	38.60
321	1.162	0.210	1.582	29.51	5.33	40.17
322	1.225	0.210	1.645	31.12	5.33	41.78

O-Ring USA Standard Sizes

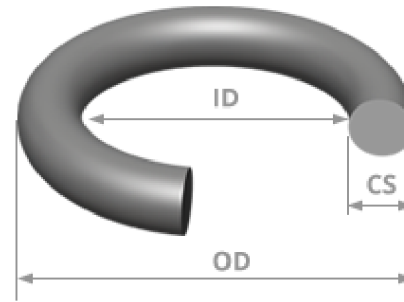


Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
323	1.287	0.210	1.707	32.69	5.33	43.35
324	1.350	0.210	1.770	34.29	5.33	44.95
325	1.475	0.210	1.895	37.47	5.33	48.13
326	1.600	0.210	2.020	40.64	5.33	51.30
327	1.725	0.210	2.145	43.82	5.33	54.48
328	1.850	0.210	2.270	46.99	5.33	57.65
329	1.975	0.210	2.395	50.17	5.33	60.83
330	2.100	0.210	2.520	53.34	5.33	64.00
331	2.225	0.210	2.645	56.52	5.33	67.18
332	2.350	0.210	2.770	59.69	5.33	70.35
333	2.475	0.210	2.895	62.87	5.33	73.53
334	2.600	0.210	3.020	66.04	5.33	76.70
335	2.725	0.210	3.145	69.22	5.33	79.88
336	2.850	0.210	3.270	72.39	5.33	83.05
337	2.975	0.210	3.395	75.57	5.33	86.23
338	3.100	0.210	3.520	78.74	5.33	89.40
339	3.225	0.210	3.645	91.92	5.33	102.58
340	3.350	0.210	3.770	85.09	5.33	95.75
341	3.475	0.210	3.895	88.27	5.33	98.93
342	3.600	0.210	4.020	91.44	5.33	102.10
343	3.725	0.210	4.145	94.62	5.33	105.28
344	3.850	0.210	4.270	97.79	5.33	108.45
345	3.975	0.210	4.395	100.97	5.33	111.63
346	4.100	0.210	4.520	104.14	5.33	114.80
347	4.225	0.210	4.645	107.32	5.33	117.98

O-Ring USA Standard Sizes

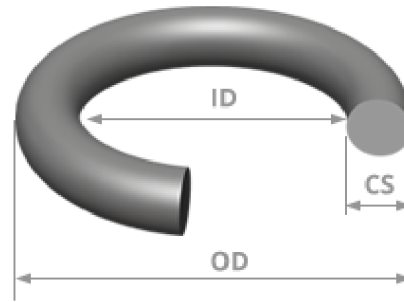


Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
348	4.350	0.210	4.770	110.49	5.33	121.15
349	4.475	0.210	4.895	113.67	5.33	124.33
350	4.600	0.210	5.020	116.84	5.33	127.50
351	4.725	0.210	5.145	120.02	5.33	130.68
352	4.850	0.210	5.270	123.19	5.33	133.85
353	4.975	0.210	5.395	126.37	5.33	137.03
354	5.100	0.210	5.520	129.54	5.33	140.20
355	5.225	0.210	5.645	132.72	5.33	143.38
356	5.350	0.210	5.770	135.89	5.33	146.55
357	5.475	0.210	5.895	139.07	5.33	149.73
358	5.600	0.210	6.020	142.24	5.33	152.90
359	5.725	0.210	6.145	145.42	5.33	156.08
360	5.850	0.210	6.270	148.59	5.33	159.25
361	5.975	0.210	6.395	151.77	5.33	162.43
362	6.225	0.210	6.645	158.12	5.33	168.78
363	6.475	0.210	6.895	164.47	5.33	175.13
364	6.725	0.210	7.145	170.82	5.33	181.48
365	6.975	0.210	7.395	177.17	5.33	187.83
366	7.225	0.210	7.645	183.52	5.33	194.18
367	7.475	0.210	7.895	189.87	5.33	200.53
368	7.725	0.210	8.145	196.22	5.33	206.88
369	7.975	0.210	8.395	202.57	5.33	213.23
370	8.225	0.210	8.645	208.92	5.33	219.58
371	8.475	0.210	8.895	215.27	5.33	225.93
372	8.725	0.210	9.145	221.62	5.33	232.28

O-Ring USA Standard Sizes

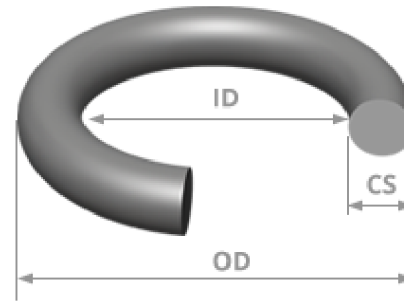


Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
373	8.975	0.210	9.395	227.97	5.33	238.63
374	9.225	0.210	9.645	234.32	5.33	244.98
375	9.475	0.210	9.895	240.67	5.33	251.33
376	9.725	0.210	10.145	247.02	5.33	257.68
377	9.975	0.210	10.395	253.37	5.33	264.03
378	10.475	0.210	10.895	266.07	5.33	276.73
379	10.975	0.210	11.395	278.77	5.33	289.43
380	11.475	0.210	11.895	291.47	5.33	302.13
381	11.975	0.210	12.395	304.17	5.33	314.83
382	12.975	0.210	13.395	329.57	5.33	340.23
383	13.975	0.210	14.395	354.97	5.33	365.63
384	14.975	0.210	15.395	380.37	5.33	391.03
385	15.955	0.210	16.375	405.26	5.33	415.92
386	16.955	0.210	17.375	430.66	5.33	441.32
387	17.955	0.210	18.375	456.06	5.33	466.72
388	18.955	0.210	19.375	481.41	5.33	492.07
389	19.955	0.210	20.375	506.81	5.33	517.47
390	20.955	0.210	21.375	532.21	5.33	542.87
391	21.955	0.210	22.375	557.61	5.33	568.27
392	22.940	0.210	23.360	582.68	5.33	593.34
393	23.940	0.210	24.360	608.08	5.33	618.74
394	24.940	0.210	25.360	633.48	5.33	644.14
395	25.940	0.210	26.360	658.88	5.33	669.54

O-Ring USA Standard Sizes

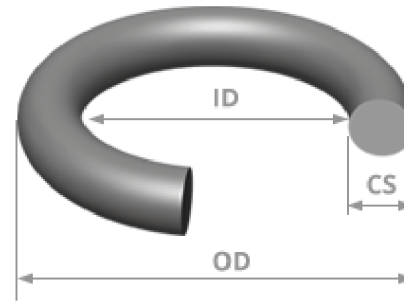


Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
400	1.350	0.275	1.900	34.29	6.99	48.26
401	1.475	0.275	2.025	37.47	6.99	51.44
402	1.600	0.275	2.150	40.64	6.99	54.61
403	1.725	0.275	2.275	43.82	6.99	57.79
404	1.850	0.275	2.400	46.99	6.99	60.96
405	1.975	0.275	2.525	50.17	6.99	64.14
406	2.100	0.275	2.650	53.34	6.99	67.31
407	2.225	0.275	2.775	56.52	6.99	70.49
408	2.350	0.275	2.900	59.69	6.99	73.66
409	2.475	0.275	3.025	62.87	6.99	76.84
410	2.600	0.275	3.150	66.04	6.99	80.01
411	2.725	0.275	3.275	69.22	6.99	83.19
412	2.850	0.275	3.400	72.39	6.99	86.36
413	2.975	0.275	3.525	75.57	6.99	89.54
414	3.100	0.275	3.650	78.74	6.99	92.71
415	3.225	0.275	3.775	81.92	6.99	95.89
416	3.350	0.275	3.900	85.09	6.99	99.06
417	3.475	0.275	4.025	88.27	6.99	102.24
418	3.600	0.275	4.150	91.44	6.99	105.41
419	3.725	0.275	4.275	94.62	6.99	108.59
420	3.850	0.275	4.400	97.79	6.99	111.76
421	3.975	0.275	4.525	100.97	6.99	114.94
422	4.100	0.275	4.650	104.14	6.99	118.11
423	4.225	0.275	4.775	107.32	6.99	121.29
424	4.350	0.275	4.900	110.49	6.99	124.46
425	4.475	0.275	5.025	113.67	6.99	127.65

O-Ring USA Standard Sizes

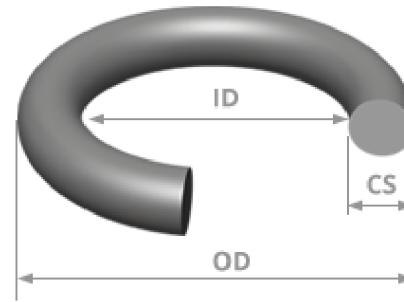


Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
426	4.600	0.275	5.150	116.84	6.99	130.82
427	4.725	0.275	5.275	120.02	6.99	134.00
428	4.850	0.275	5.400	123.19	6.99	137.17
429	4.975	0.275	5.525	126.37	6.99	140.35
430	5.100	0.275	5.650	129.54	6.99	143.52
431	5.225	0.275	5.775	132.72	6.99	146.70
432	5.350	0.275	5.900	135.89	6.99	149.87
433	5.475	0.275	6.025	139.07	6.99	153.05
434	5.600	0.275	6.150	142.24	6.99	156.22
435	5.725	0.275	6.275	145.42	6.99	159.40
436	5.850	0.275	6.400	148.59	6.99	162.57
437	5.975	0.275	6.525	151.77	6.99	165.75
438	6.225	0.275	6.775	158.12	6.99	172.10
439	6.475	0.275	7.025	164.47	6.99	178.45
440	6.725	0.275	7.275	170.82	6.99	184.80
441	6.975	0.275	7.525	177.17	6.99	191.15
442	7.225	0.275	7.775	183.52	6.99	197.50
443	7.475	0.275	8.025	189.87	6.99	203.85
444	7.725	0.275	8.275	196.22	6.99	210.20
445	7.975	0.275	8.525	202.57	6.99	216.55
446	8.475	0.275	9.025	215.27	6.99	229.25
447	8.975	0.275	9.525	227.97	6.99	241.95
448	9.475	0.275	10.025	240.67	6.99	254.65
449	9.975	0.275	10.525	253.37	6.99	267.35
450	10.475	0.275	11.025	266.07	6.99	280.05
451	10.975	0.275	11.525	278.77	6.99	292.75

O-Ring USA Standard Sizes

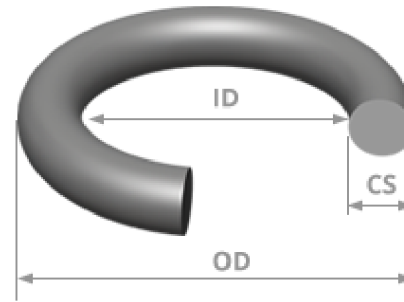

Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
452	11.475	0.275	12.025	291.47	6.99	305.45
453	11.975	0.275	12.525	304.17	6.99	318.15
454	12.475	0.275	13.025	316.87	6.99	330.85
455	12.975	0.275	13.525	329.57	6.99	343.55
456	13.457	0.275	14.007	342.27	6.99	356.25
457	13.975	0.275	14.525	354.97	6.99	368.95
458	14.475	0.275	15.025	367.67	6.99	381.65
459	14.975	0.275	15.525	380.37	6.99	394.35
460	15.475	0.275	16.025	393.07	6.99	407.05
461	15.955	0.275	16.505	405.26	6.99	419.24
462	16.455	0.275	17.005	417.96	6.99	431.94
463	16.955	0.275	17.505	430.66	6.99	444.64
464	17.455	0.275	18.005	443.36	6.99	457.34
465	17.955	0.275	18.505	456.06	6.99	470.04
466	18.455	0.275	19.005	468.76	6.99	482.74
467	18.955	0.275	19.505	481.46	6.99	495.44
468	19.455	0.275	20.005	494.16	6.99	508.14
469	19.955	0.275	20.505	506.86	6.99	520.84
470	20.955	0.275	21.505	532.26	6.99	546.24
471	21.955	0.275	22.505	557.66	6.99	571.64
472	22.940	0.275	23.490	582.68	6.99	596.66
473	23.940	0.275	24.490	608.08	6.99	622.06
474	24.940	0.275	25.490	633.48	6.99	647.46
475	25.940	0.275	26.490	658.88	6.99	672.86
901	0.185	0.056	0.297	4.70	1.42	7.54

O-Ring USA Standard Sizes

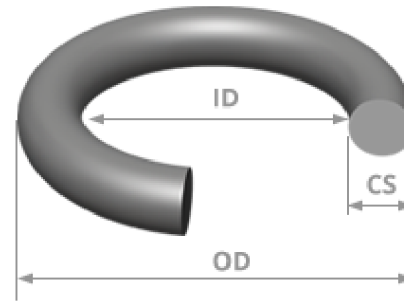

Size: AS568	I.D. Inch	C.S. Inch	O.D. Inch	I.D. MM	C.S. MM	O.D. MM
902	0.239	0.064	0.367	6.07	1.63	9.33
903	0.301	0.064	0.429	7.65	1.63	10.91
904	0.351	0.072	0.495	8.92	1.83	12.58
905	0.414	0.072	0.558	10.52	1.83	14.18
906	0.468	0.078	0.624	11.89	1.98	15.85
907	0.530	0.082	0.694	13.46	2.08	17.62
908	0.644	0.087	0.818	16.36	2.21	20.78
909	0.706	0.097	0.900	17.93	2.46	22.85
910	0.755	0.097	0.949	19.18	2.46	24.10
911	0.863	0.116	1.095	21.92	2.95	27.82
912	0.924	0.116	1.156	23.47	2.95	29.37
913	0.986	0.116	1.218	25.04	2.95	30.94
914	1.047	0.116	1.279	26.59	2.95	32.49
916	1.171	0.116	1.403	29.74	2.95	35.64
918	1.355	0.116	1.587	34.42	2.95	40.32
920	1.475	0.116	1.707	37.47	3.00	43.47
924	1.720	0.116	1.952	43.69	3.00	49.69
928	2.090	0.116	2.322	53.09	3.00	59.09
932	2.337	0.116	2.569	59.36	3.00	65.36